

 **Steel**  
Zinc plated

 **Steel**  
Zinc plated

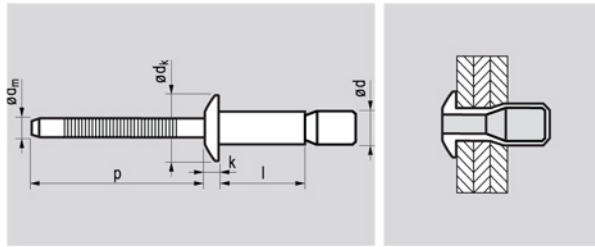

## P-LOCK | high strength | dome head

| Ø d   | l    |  | Item nr.        | Ø d <sub>k</sub>  | k    | Ø d <sub>m</sub> | p    |  |  |
|---|------|---|-----------------|-------------------|------|------------------|------|---|---|
| [mm]  | [mm] | [mm]  |                 | [mm]              | [mm] | [mm]             | [mm] | [N]   | [N]   |
| <b>6,4</b>  | 14,0 | 2,0-9,5   | <b>17916414</b> |                   |      |                  |      |   |   |
| [+/-0,11]   | 20,0 | 2,0-15,9  | <b>6420</b>     | 13,0<br>[+/-0,35] | ≤3,1 | ~4,00            | ≥27  | 10.000  | 11.700  |
|  |      |   |                 |                   |      |                  |      |   |   |
| Ø 6,6 [6,9 max]   |      |   |                 |                   |      |                  |      |   |   |

**B.S.N.** - the professional fastener



Blind rivets